




Model: VHYD-03 Hydraulically Operated Diaphragm Type Dosing Pumps

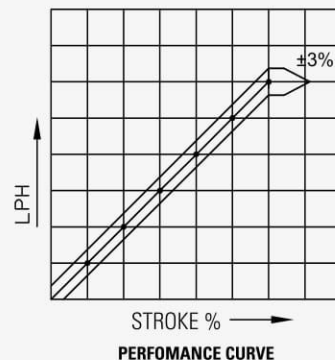

SELECTION CHART


PUMP SPEED – 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				PL. Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED – 200 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap LPH	Suc. Del. mm NB/BSP	% OF Max. Pr.	Motor K.W.			Cap LPH	Suc. Del. mm NB/BSP	% OF Max. Pr.	Motor K.W.
59	15	100	1.5	20	200	119	15	100	0.75
86	15			24	155	171	15		
152	25			32	87	304	25		
238	25			40	56	475	25		
342	25	70	2.2	48	39	684	40	70	2.2
433	25			54	31	866	40		
571	25			62	23	1142	40		
627	40	40	1.1	65	21	1255	40	40	1.1
770	40			72	17	1540	40		
1023	40			83	13	2046	40		
1203	40	25	2.2	90	11	2406	40	25	2.2
1484	40			100	9	2968	40		

MOC CHART

Sr. No.	Description	MOC	Sr. No.	Description	MOC
01	PLUNGER	EN 8	4	NRV Sealing Ring	PTFE
02	Liquid Head	SS304, SS316, alloy20, P.P, PVC, PTFE			
03	Non Return	SS304, SS316, alloy20, P.P, PVC, PTFE	5	NRV Balls	SS,PTFE, Glass, Ceramic

FEATURE

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset
- The design and performance of VHYD series pumps conforms to API675

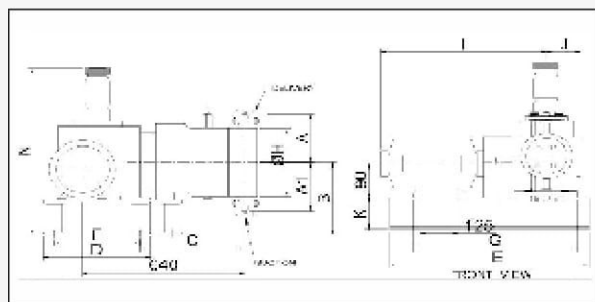

DIMENSIONS IN mm

A	A1	B	C	D	E	F
255	255	275	240	560	605	305
G	H	I	J	L	N	
543	290	590	108	75	290	

WEIGHT (App) : 200 Kg

PACKING SIZE : 32X28X27 Inches